


PAGE 1 OF 2

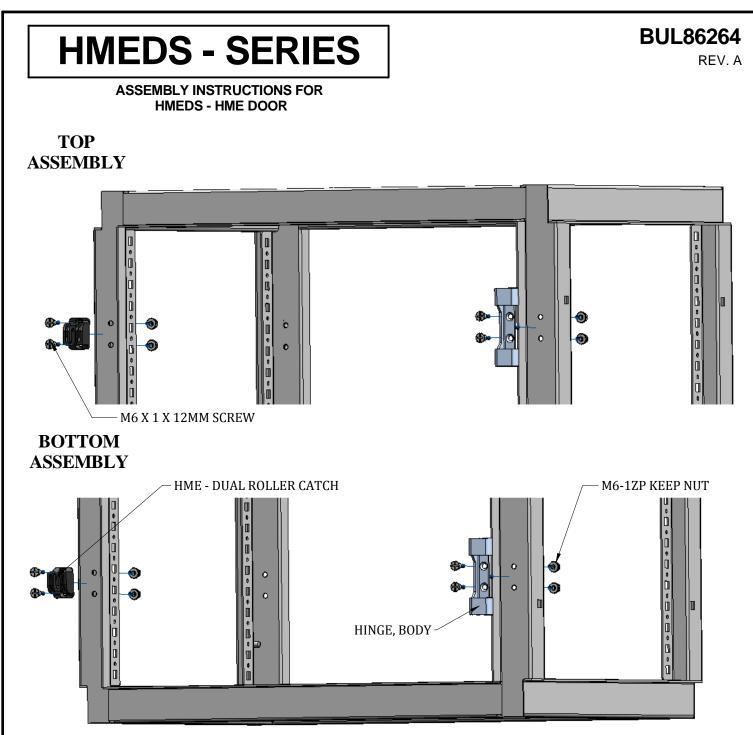

REMOVAL INSTRUCTIONS:

A) Using a phillips screwdriver, unscrew the M6 screw and remove the M6 nut.

B) Remove the hinge and dual roller catch.

INSTALLATION INSTRUCTIONS:

A) Align the hinge and dual roller catch with the holes on the frame as shown above.

B) Make sure the top two dual roller catch are positioned according to the top assembly and the bottom two according to the bottom assembly.

C) Install M6 screw and nut and tighten down.



