# **BC856T SERIES BC857T SERIES**





www.centralsemi.com

# **DESCRIPTION:**

The CENTRAL SEMICONDUCTOR BC856T and BC857T Series types are PNP Silicon Transistors manufactured by the epitaxial planar process, epoxy molded in a surface mount package, designed for general purpose switching and amplifier applications.

# **SEE MARKING CODE TABLE PAGE**

ULTRAmini™	molded in a surfac general purpose s
central	MARKING CODE: ON FOLLOWING
SOT-523 CASE	
MAXIMUM RATINGS: (T <sub>A</sub> =25°C) Collector-Base Voltage	SYMBOL BC85 VCBO 50


MAXIMUM RATINGS: (T <sub>A</sub> =25°C)	SYMBOL	BC857T	BC856T	UNITS
Collector-Base Voltage	$V_{CBO}$	50	80	V
Collector-Emitter Voltage	VCEO	45	65	V
Emitter-Base Voltage	$V_{EBO}$		5.0	V
Continuous Collector Current	Īc		100	mA
Peak Collector Current	ICM		200	mA
Peak Base Current	I <sub>BM</sub>		100	mA
Power Dissipation	$P_{D}$		250	mW
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 1	to +150	°C
Thermal Resistance	$\Theta_{JA}$		500	°C/W

ELECTRICAL	. CHARACTERISTICS:	T <sub>A</sub> =25°C unless	otherwise noted)
ELECTRICAL	. CHARACTERISTICS.	1 A-23 C UIIICSS	Otherwise Hoteur

SYMBOL	TEST CONDITIONS (	MIN	TYP	MAX	UNITS
I <sub>CBO</sub>	V <sub>CB</sub> =30V			15	nA
ICBO	V <sub>CB</sub> =30V, T <sub>A</sub> =150°C			5.0	μΑ
IEBO	V <sub>EB</sub> =5.0V			100	nA
BV <sub>CBO</sub>	I <sub>C</sub> =10μA (BC857T)	50			V
BVCBO	I <sub>C</sub> =10μA (BC856T)	80			V
BVCEO	I <sub>C</sub> =10mA (BC857T)	45			V
BVCEO	I <sub>C</sub> =10mA (BC856T)	65			V
BVEBO	I <sub>E</sub> =10μA	5.0			V
VCE(SAT)	I <sub>C</sub> =10mA, I <sub>B</sub> =0.5mA			0.20	V
VCE(SAT)	I <sub>C</sub> =100mA, I <sub>B</sub> =5.0mA			0.40	V
VBE(ON)	I <sub>C</sub> =2.0mA, V <sub>CF</sub> =5.0V	0.58		0.70	V
VBE(ON)	I <sub>C</sub> =10mA, V <sub>CF</sub> =5.0V			0.77	V
fT	$V_{CF}$ =5.0V, $I_{C}$ =10mA, f=100MHz	100			MHz
Ċ <sub>c</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0, f=1.0MHz			2.5	pF
Ce	V <sub>EB</sub> =0.5V, I <sub>C</sub> =0, f=1.0MHz		10		pF
NF	V <sub>CF</sub> =5.0V, I <sub>C</sub> =200μA,				
	$R_S$ =2.0K $\Omega$ , f=1.0KHz, BW=200Hz			10	dB

		BC8	356AT	BC8	56BT		
		BC8	857AT	BC8	57BT	BC	357CT
		MIN	MAX	MIN	MAX	MIN	MAX
hFE	$V_{CE}$ =5.0V, $I_{C}$ =2.0mA	125	250	220	475	420	800


# BC856T SERIES BC857T SERIES





# **SOT-523 CASE - MECHANICAL OUTLINE**

# **BOTTOM VIEW**

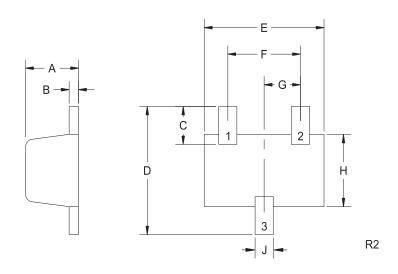

# LEAD CODE:

- 1) BASE
- 2) EMITTER
- 3) COLLECTOR

DEVICE	MARKING CODE
BC856AT	GT6
BC856BT	GT7
BC857AT	GT8
BC857BT	GT9
BC857CT	GT0

DIMENSIONS					
	INCHES		MILLIMETER		
SYMBOL	MIN	MAX	MIN	MAX	
Α	0.023	0.031	0.58	0.78	
В	0.002	0.008	0.04	0.20	
С	0.013	0.021	0.34	0.54	
D	0.059	0.067	1.50	1.70	
Е	0.059	0.067	1.50	1.70	
F	0.035	0.043	0.90	1.10	
G	0.020		0.	50	
Н	0.031	0.039	0.78	0.98	
J	0.010	0.014	0.25	0.35	

SOT-523 (REV: R2)

R1 (20-November 2009)

# **OUTSTANDING SUPPORT AND SUPERIOR SERVICES**



## PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- · Inventory bonding
- · Consolidated shipping options

- · Custom bar coding for shipments
- · Custom product packing

## **DESIGNER SUPPORT/SERVICES**

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- · Custom electrical curves
- Environmental regulation compliance
- · Customer specific screening
- · Up-screening capabilities

- · Special wafer diffusions
- · PbSn plating options
- Package details
- · Application notes
- · Application and design sample kits
- · Custom product and package development

### **CONTACT US**

## Corporate Headquarters & Customer Support Team

Central Semiconductor Corp. 145 Adams Avenue Hauppauge, NY 11788 USA Main Tel: (631) 435-1110

Main Fax: (631) 435-1824 Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives: www.centralsemi.com/wwreps

**Worldwide Distributors:** 

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms

www.centralsemi.com (000)